

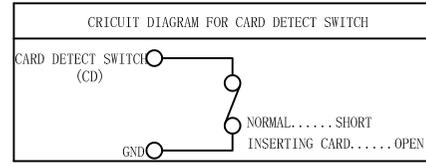
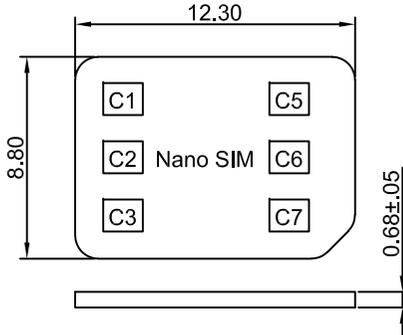
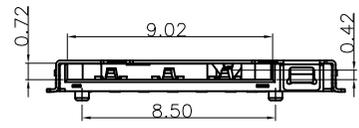
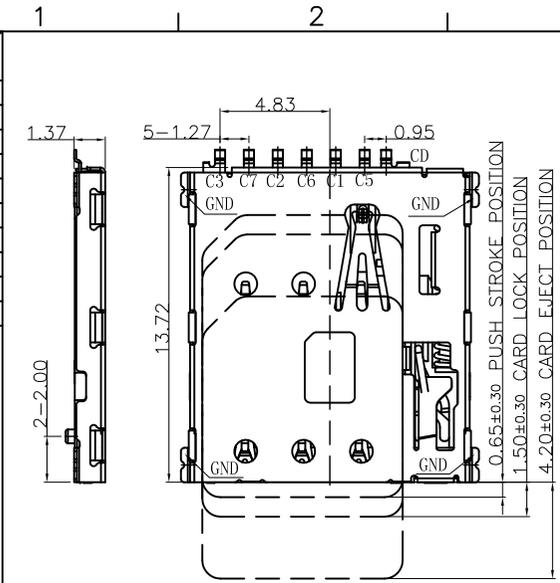


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

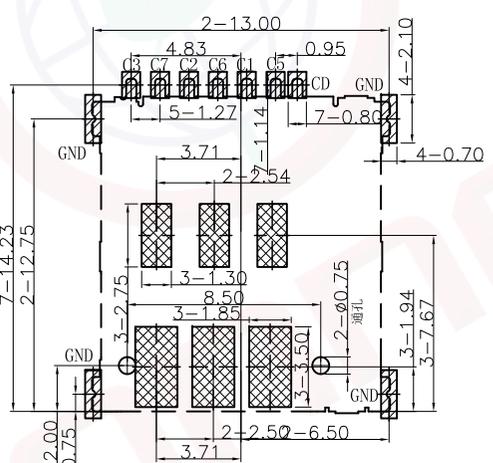

PIN/NO	ASSIGNMENT
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
CD	Detect Switch

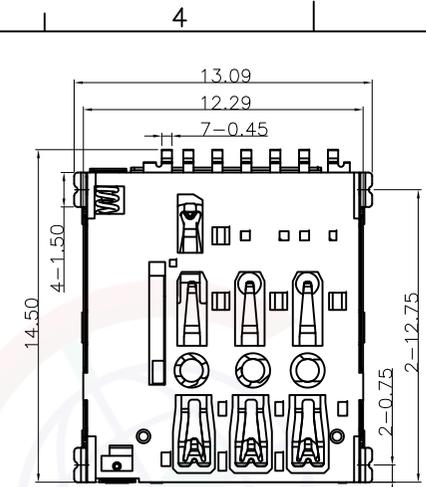

Recommended PCB layout
Tolerance:±0.05


- SMT Solder area
- Copper restricted area
- 1.Touch area of contact
- 2.NO First PCB_layout Circuits in the area

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/29/25'		

Notes:

- 1.Material:
 - 1.1. Housing: High Temp., UL 94V-0 Color of Black.
 - 1.2. Contacts: Copper Alloy.
 - 1.3. Shell: Stainless Steel.
- 2.Finish:
 - 2.1. Contact Area: Gold Over Nickel
 - 2.2. Solder Area: Gold Over Nickel.
- 3.Specifications:
 - 3.1. Temperature Rated: -40°C TO +85°C
 - 3.2. Contact Resistance: 100mΩ Max.
 - 3.3. Insulation Resistance: 1000MΩ Min.
 - 3.4. Withstanding Voltage : 500V AC.
 - 3.5. Current Rating: 0.5A.
 - 3.6. Voltage Rating: 30V.
- 4.Product Number Code:

DS1138-22 - XX X X X X X X - 01

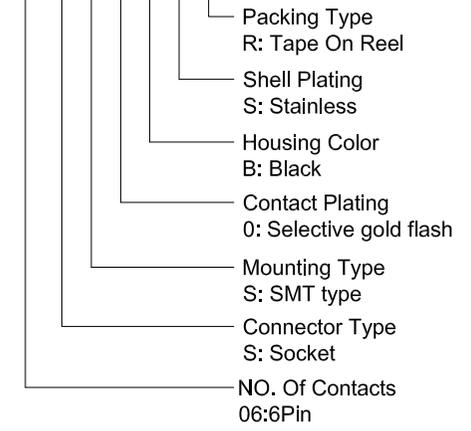

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
	1.27mm NANO SIM Card
UNITS	mm
SHEET SIZE	A4
SERIES	DS1138-22 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1138-22-XXXXX-01-A

晨翔电子有限公司
CONNELY CONNELY ELECTRONIC CO. LTD

