


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	WPY 02/24/25'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights of CONNPLY Electronic Co., Ltd. are strictly protected. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

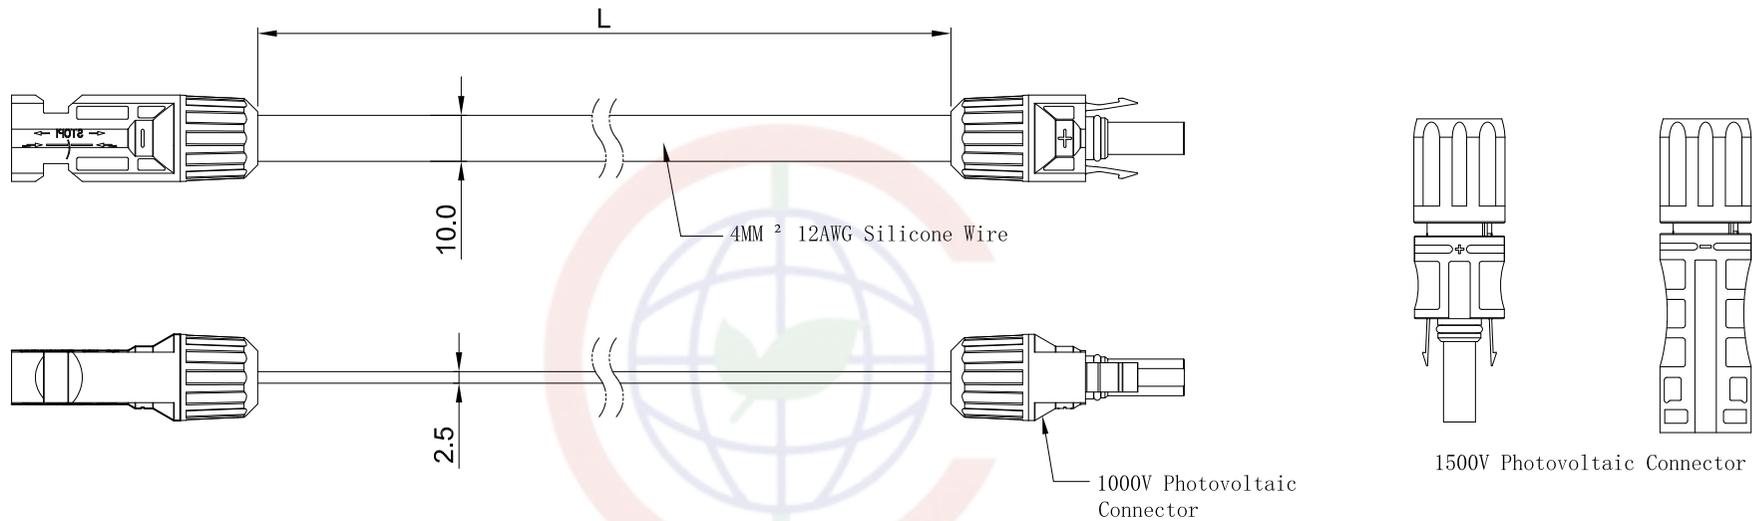

Note:

Specifications:

1. Rated voltage:1000/1500V
2. Rated current:30A

Materials:

1. Insulation material:Silicone
2. Conductor material:Tin plated copper
3. Temperature range:-20℃~+90℃

Product Number Code:

DS1196-06-X X X X X X X

- Wire length(Dim L):
050:50mm 100:100mm.....
- Cable size:
A:4mm² B:6mm²
- Voltage type:
H:1500V L:1000V(For 4mm² Only)
- Cable color:
B:Black R:Red
- Contact plating:
6:Tin plated
- Housing color:
B:Black
- 1T1:Male+Female



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	Photovoltaic extension flat cable				
X.	±0.60	X.	±5°	UNITS	mm	SERIES	DS1196-06 Series				
.X	±0.38	.X	±3°	SHEET SIZE	A4						
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNPLY CONNPLY ELECTRONIC CO. LTD						
SCALE		1:1	SHEET							1 OF 1	
DRAWING NO.		C-DS1196-06-XXXXXX-A									